

MONO

POLY



# HELIENE

# 72<sup>M</sup>

## 72-CELL MONOCRYSTALLINE MODULE

### 370 Wp

MAX POWER OUTPUT

### 19.3%

MAX EFFICIENCY

### 10 YEAR

PRODUCT WARRANTY


### 25 YEAR

LINEAR PERFORMANCE GUARANTEE

HELIENE INC. IS A PREMIER SOLAR MODULE MANUFACTURER, SERVICING THE GROWING SOLAR ENERGY MARKETS OF NORTH AMERICA.

COMBINING PROVEN EUROPEAN TECHNOLOGY WITH NORTH AMERICAN INGENUITY ALLOWS HELIENE TO MAKE A REAL COMMITMENT IN PROVIDING SMARTER ENERGY CHOICES FOR THE FUTURE.

**HELIENE**  
[www.heliene.com](http://www.heliene.com)

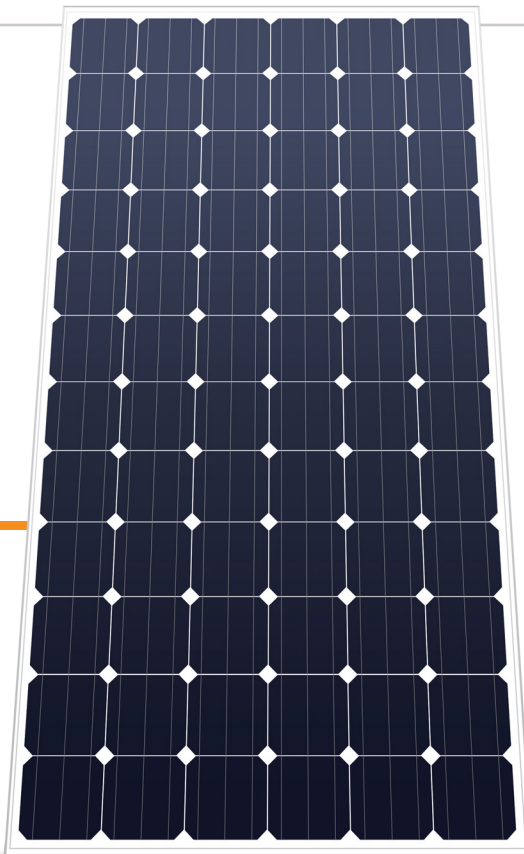

GUARANTEED POSITIVE POWER SORTING: [-0 : +4.99 WP]



AVAILABLE IN 1000V OR 1500V (DC) VOLTAGE RATING




MANUFACTURED ACCORDING TO INTERNATIONAL QUALITY SYSTEM STANDARDS: ISO9001




H-BLACK INTEGRATION AVAILABLE (ALL-BLACK MODULE)

## LINEAR PERFORMANCE GUARANTEE



10 YEAR WORKMANSHIP WARRANTY • 25 YEAR LINEAR PERFORMANCE GUARANTEE

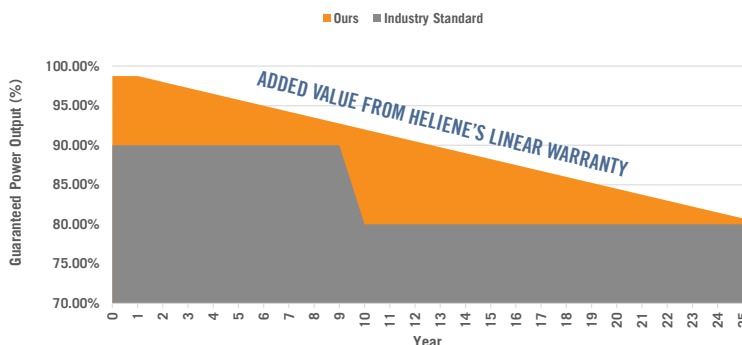

## DIMENSIONS FOR HELIENE 72M SERIES MODULES

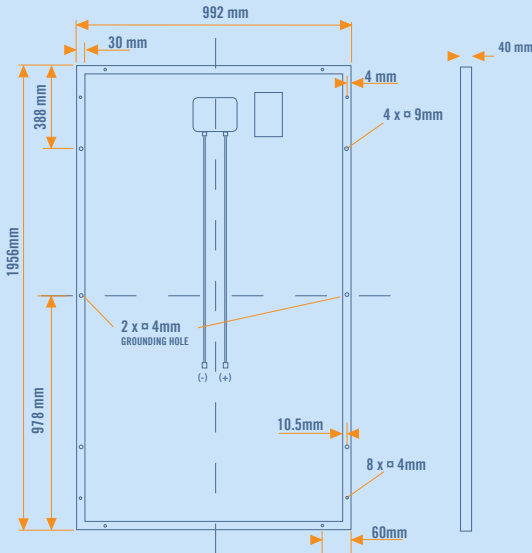

## I-V CURVE FOR HELIENE 72M SERIES

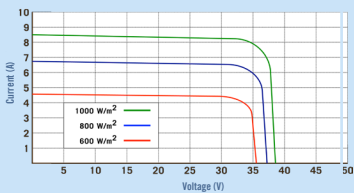

## CERTIFICATIONS



## ELECTRICAL DATA (STC)

Peak Rated Power	$P_{mpp}$ (W)	370	360	350	335	325
Maximum Power Voltage	$V_{mpp}$ (V)	40.153	39.713	39.133	38.213	37.72
Maximum Power Current	$I_{mpp}$ (A)	9.28	9.13	9.01	8.83	8.69
Open Circuit Voltage	$V_{oc}$ (V)	48.81	48.19	47.57	46.64	46.02
Short Circuit Current	$I_{sc}$ (A)	9.97	9.81	9.65	9.41	9.27
Module Efficiency *	Eff (%)	19.3	18.8	18.3	17.5	17.0
Power Output Tolerance		[- 0 , + 4.99] Wp				

STC - Standard Test Conditions: Irradiation 1000 W/m<sup>2</sup> - Air mass AM 1.5 - Cell temperature 25 °C  
 \* Calculated using maximum power based on full positive output tolerance [-0 , +4.99] Wp

## MECHANICAL DATA

Dimensions (L x W x D)	1956 x 992 x 40 mm (77 x 39 x 1.6 inch)
Weight	23.6 kg (52.4 lbs)
Output Cables	1.1 m (43.3 inch) symmetrical cables with MC4 type connectors
Junction Box	IP-67 rated with 3 bypass diodes
Frame	Double webbed 15 micron anodized aluminum alloy
Front Glass	Low-iron content, high-transmission PV solar glass
Solar Cells	72 Monocrystalline cells (156 x 156 mm)

## CERTIFICATIONS

UL Listed	ULC/ORD-C1703-1 , UL1703, UL1703 Fire Classification Type 1
IEC Listed	IEC 61215, IEC 61730

All Heliene modules are certified under the California Energy Commission (CEC) Listing Report

## TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)
Temperature Coefficient of $P_{max}$	-0.39%/°C
Temperature Coefficient of $V_{oc}$	-0.31%/°C
Temperature Coefficient of $I_{sc}$	0.045%/°C

## PACKAGING CONFIGURATION

Modules per box:	26 pieces
Modules per 53' trailer:	780 pieces

## MAXIMUM RATINGS

Operational Temperature	-40°C - +85°C
Max System Voltage	1500V (UL / IEC)
Max Series Fuse Rating	15 A

## WARRANTY

10 Year Manufacturer's Workmanship Warranty

25 Year Linear Power Guarantee

(Refer to product warranty page for details)

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.  
 © 2017 Heliene Inc. All rights reserved. Specifications included in this datasheet are subject to change without notice.